



MOSHER

Design Guide

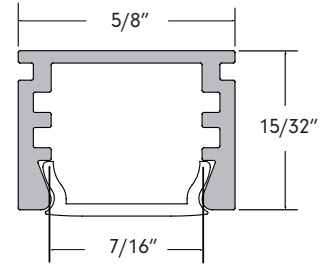

Profile & Dimensions

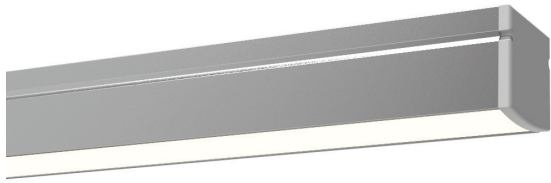

Available TivoTape Options - Indoor

DEFINE

LB
SB
HO

ELITE

SB
HO
VHO

ELITE+

Standard
Pro
Vision
Flow

FUSE24

RGB
RGBW

FUSE12

PiXEL RGB

Available TivoTape Options - Outdoor

DEFINE

SB
LB

FUSE24

RGB

FUSE12

PiXEL RGB

Ordering Information



MOSR-CHAN-SLV-6.5
Anodized Aluminum Extrusion,
available in 6.5' lengths



MOSR-LNS-OPL-6.5
Opal lens, length 6.5'



MOSR-EC-01
Solid End Cap




MOSR-EC-02
Powerfeed End Cap



MTBK-03
Mounting Clip

Photometrics (based on 27K DW)

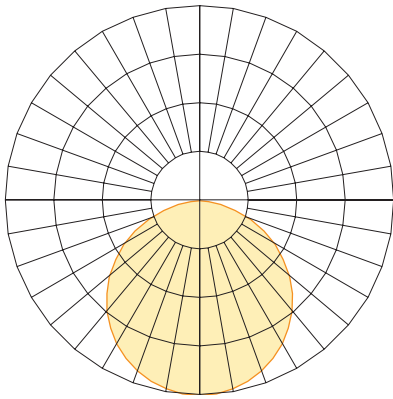

MOSHER WITH 2700K DW
Delivered Lumens per foot: 66
Watts per foot: 3.3
CRI : 98
Peak Candela: 23.4

